



Innovative Safety Solutions

Anti-Slip Grit-Coated Step Covers

Anti-Slip Step Cover Features

- Made from Fiber Reinforced Polymers
- Waterproof and highly chemical resistant
- Minimize trip hazards
- Made for interior and exterior applications; ideal for slippery areas
- Suitable for grated, concrete, wood or metal steps
- Can be trimmed on site using a fine-toothed saw if required

Step Covers Available in Heavy Duty, Medium and Light Grit Surfaces


1 inch nose available in 3, 6 and 9 inch depths.

2 inch nose available in 8 and 11.75 inch depths

Custom lengths available upon request

Install using adhesive and/or mechanical fasteners






Sure-Foot Grit-Coated Step Covers provide a more durable, permanent anti-slip product to fit virtually any step surface.

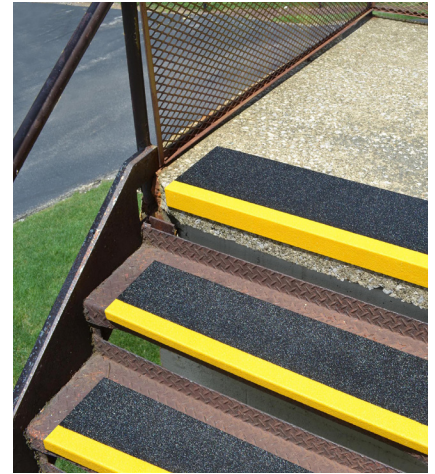

Our Fiberglass Reinforced Polymer (FRP) products are coated with a proprietary layered blend of mineral abrasive epoxy grit, are lightweight, and ideal for use on structurally sound surfaces. Slippery surfaces such as gratings, mezzanines, steps, inclines, ramps and floors can be covered with our fiberglass step covers or walkway panels. All are available in YELLOW or BLACK with three distinct grit coating options: HEAVY DUTY, MEDIUM and LIGHT.

» Step Covers Available in Various Depths & Customized Lengths

Our 3 inch, 6 inch, and 9 inch step covers have a 1 inch nose and our 8 inch and 11.75 inch step covers have a 2 inch nose.

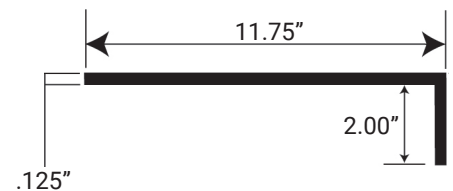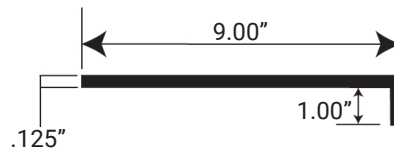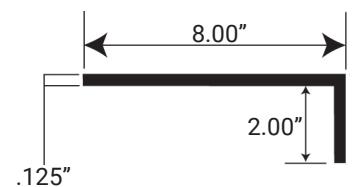

CONTACT US FOR A SAMPLE AT 800-522-6566



» Step Cover Specifications

In today's litigious society, business owners need to do everything possible to ensure guest safety. At Sure-Foot Industries, our goal is to make available the latest technology and advancements in products for safe pedestrian access. Business owners can't go wrong with our quality and workmanship. All of our fiberglass step covers are available in three distinct grit coating options: Heavy Duty, Medium and Light.


HEAVY DUTY GRIT



MEDIUM GRIT

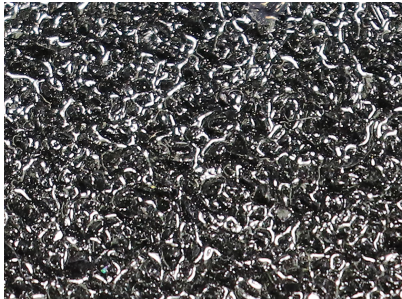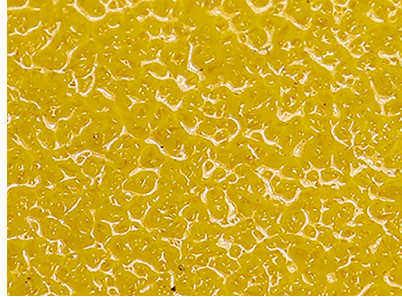

LIGHT GRIT

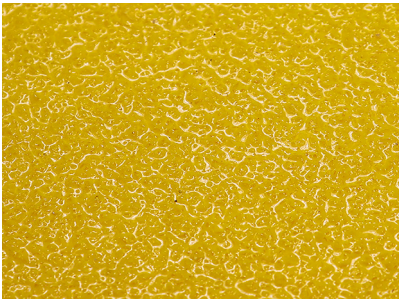

» Step Cover Specifications

Our products are built for the long haul. Even if a business has thousands of people crossing its thresholds on a daily basis for many years, our grit panels and step covers hold up to the test. We aim to improve the safety of any public space or private building by offering our high-quality American Made products. The materials used to create our fiberglass stair covers exceed our quality standards for safety and effectiveness. All step covers meet and exceed OSHA and ADA recommendations for slip resistance.

Grit Sizes and Applications			
GRADE	APPLICATION	MESH SIZE	OVERALL THICKNESS
Heavy Duty	Industrial, Offshore, Marine	8/16 Blend	.20"
Medium	Commercial	20/30 Blend	.18"
Light	Residential, Light Commercial (Suitable for barefoot traffic)	30/50 Blend	.151"



20260 First Avenue | Cleveland, Ohio 44130 | Toll Free: 800-522-6566 | www.surefootcorp.com
AMERICAN MADE & AMERICAN OWNED SINCE 1979

Anti-Slip Grit-Coated Step Cover Specifications:

Thickness:
.125" (1/8") prior to grit application

Standard Depths:
3", 6", 8", 9", 11.75"
(can be customized)

Customized Lengths:
up to
12 feet (144")


FRP Step Covers are non-weight bearing and must be installed on structurally sound steps

Stock sizes available for quick shipping

High coefficient of friction

Visit
www.surefootcorp.com
for additional
installation instructions

Made in USA

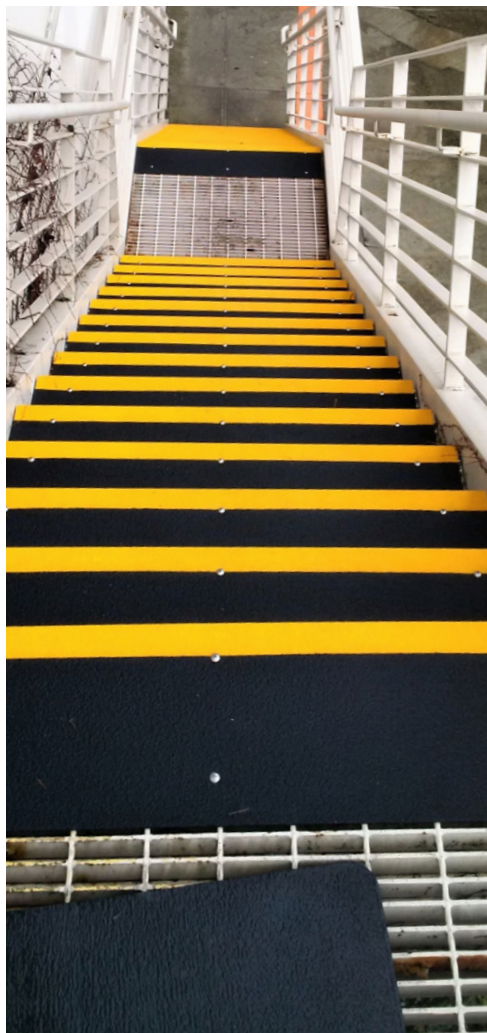

ASTM Test Results

Test Method	Test Type	Performance Criteria
FMVSS 302	Flammability	PASS
ASTM E648-15e1	Critical Radiant Flux	$\geq .5 \text{ W / cm}^2$
ASTM E662-15	Density of Smoke	Ds (1.5 min.) ≤ 100 Ds (4.0min.) ≤ 200
BSS 7239	Toxic Gas Generation	PASS: HCN $\leq 150 \text{ ppm}$ CO $\leq 3500 \text{ ppm}$ NO/NO2 $\leq 100 \text{ ppm}$ HF $\leq 200 \text{ ppm}$ HLC $\leq 500 \text{ ppm}$

Mechanical Properties

Test Method	Test Type	Performance Criteria
ASTM D638	Tensile Strength	8,000 Psi
ASTM D638	Tensile Modulus	1.7 Psi X 10 ⁹
ASTM D790	Flexural Strength	22,100 Psi
ASTM D790	Flexural Strength 130°C	13,100 Psi
ASTM D695	Compressive Strength	33,100 Psi
ASTM D732	Shear Strength	11,600 Psi
ASTM D256	IZOD Impact (notched)	8.9 ft. lb. / inch

» Fasteners Available



Truss Head #10
Stainless Steel Screws
1.5" Length

SUBSTRATES:

- Concrete
- Steel/ Aluminum-
Diamond Plate
- Flat Steel
- Flat Aluminum



Grating Clip Kit
2"x 1/4" Length
Nylon Nut, Galvanized G-Glip

SUBSTRATES:

- Fiberglass Grating
- Steel Grating



MODIFIED Truss Head #8
Stainless Steel Screws
1.25" Length

SUBSTRATES:

- Wood
- Steel/ Aluminum-
Diamond Plate
- Flat Steel
- Flat Aluminum

⚠ Warning: Drilling, sawing, sanding or machining fiberglass can expose you to fiberglass dust that contains styrene, a substance that is known to the State of California to cause cancer. Avoid inhaling fiberglass dust. For your protection, Proper use of Personal Protection Devices are recommended. For more information go to www.P65warnings.ca.gov



20260 First Avenue | Cleveland, Ohio 44130 | Toll Free: 800-522-6566 | www.surefootcorp.com
AMERICAN MADE & AMERICAN OWNED SINCE 1979

Anti-Slip Grit-Coated Step Covers

Sure-Foot Grit-Coated Step Covers provide a more durable, permanent anti-slip product to fit virtually any step surface. Fiberglass step covers are lightweight and ideal for use on structurally sound surfaces. All of our fiberglass step covers are available in three distinct grit coating options: Heavy Duty, Medium and Light.

3 INCH DEPTH STEP COVER WITH 1 INCH NOSE



Our 3 inch fiberglass step covers are highlighted to alert pedestrians to a potential safety hazard. Standard colors of highlighting for our commercial stair covers are safety yellow and black.

6 OR 9 INCH DEPTH STEP COVER WITH 1 INCH NOSE



Our standard 6 and 9 inch grit-coated step covers come with a 1 inch nose and is available in safety yellow, black and black with a yellow sightline. The yellow stripe draws attention to the front edge of the stair steps.

8 OR 11.75 INCH DEPTH STEP COVER WITH 2 INCH NOSE



Our grit-coated fiberglass step covers are available in 8 and 11.75 inch depths to suit many business applications, from scaffolding, to ladders and more. These fiberglass stair treads are available in safety yellow, black and black with a yellow sightline to increase pedestrian awareness at the front edge of the step.



20260 First Avenue | Cleveland, Ohio 44130 | Toll Free: 800-522-6566 | www.surefootcorp.com
AMERICAN MADE & AMERICAN OWNED SINCE 1979