



MASTER STOP™ SAFETY TAPES AND TREADS

MASTER STOP™ SAFETY TAPES AND TREADS FEATURES

-  **OSHA & ADA Slip-Resistant**
Exceeds safety recommendations for walking surfaces.
-  **Peel-and-Stick Installation**
Applies quickly to clean, dry, flat surfaces without mechanical fasteners.
-  **Various Roll Widths**
Available in widths from 3/4"–48" & lengths up to 500 feet.
-  **Customize Your Solution**
Various grit sizes, materials, and colors to choose from.
-  **Precision Engineered**
Cut to tight tolerances for a clean, accurate fit every time.
-  **Custom Shapes Available**
Custom die-cut pieces can be made to fit any unique surface or application.
-  **Indoor & Outdoor Ready**
Made for interior and exterior applications, ideal for slippery areas where safety matters most.
-  **Made to Your Specs**
Custom manufacturing capabilities available for specialized or large-scale projects.
-  **Ready for Immediate Use**
Ready for foot traffic immediately after proper installation.

MASTER STOP™ SAFETY TAPES AND TREADS PROVIDE A DURABLE, ANTI-SLIP PRODUCT TO MEET SAFETY NEEDS.

Sure-Foot is a leader in workplace safety, offering pressure-sensitive adhesive anti-slip grit tapes designed to improve traction and visibility in high-risk areas. Safety Yellow and Black/Yellow Hazard options draw attention to potentially dangerous surfaces, while #50 Glow in the Dark supports visibility during darkness or power-loss evacuations. Clear tape provides anti-slip protection while allowing the underlying surface or floor signage to remain visible.

STANDARD SIZES

STANDARD ROLL SIZES

3/4", 1", 2", 3", 4", 6", 12", 18", 24" (width) X 60' (length); 24" x 500'; 48" x 500'

BULK ROLLS

Available in bulk rolls up to 48" (width) x 500' (length)

STANDARD DIE-CUT SIZES

6" x 24", 3/4" x 12", 3/4" x 18", 3/4" x 24", 1" x 12", 2" x 24", 3" x 24", 5.5" square, 5.5" round

CUSTOM SIZING

Custom die cut & custom sizing available upon request



LEARN MORE AT SUREFOOTCORP.COM OR CALL US FOR A SAMPLE AT 800-522-6566



20260 First Avenue Cleveland, OH 44130 | Toll Free: 800-522-6566 | www.surefootcorp.com

American Made & American Owned Since 1979

TAPE ROLL COLOR OPTIONS



SPECIALTY TREAD OPTIONS

Our Specialty Treads are a unique product that offers added safety and visibility while our Reflective and Glow Stripe treads help increase awareness in poorly lit areas. All Specialty Treads are offered in precut sizes for your convenience and easy installation. Standard tread dimensions of 6" W x 24" L.



22—Caution

25—Watch Your Step


19—Black*



17—BLK/YL Hazard*

12—Yellow Stripe

GLOW IN THE DARK OPTIONS

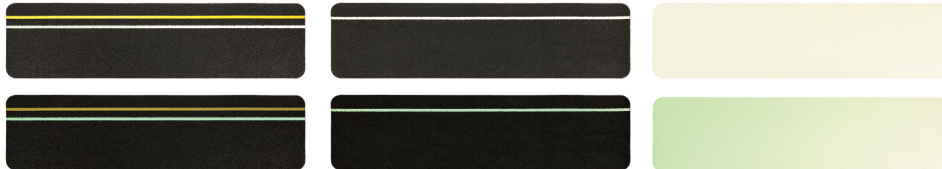

16—Ultimate Tread
(With Glow in the Dark Stripe)

13—Glow Stripe

50—Glow in the Dark

*Additional Sizes Available

INSTALLATION

Testing of adhesive before installation is suggested.

Repair application area by filling any cracks or pits. Seal porous surfaces. DO NOT apply over grout lines.

Surface temperature must be above 50°F and below 100°F.

Clean surface using industrial cleaner. Remove any oils, dirt and loose paint, area must be free of debris.

Flush surface to remove any residue.

Allow ample dry time, surface must be clean and dry.

Cut to size. Rounding corners is suggested.

Apply to clean, dry, flat surface by peeling off paper backing, keeping fingers off adhesive.

Position and press in to place, pushing from the center out to the edges to remove any air bubbles. For enhanced bond use a rubber hand roller.

Ready for immediate use.

Surface can be cleaned using mild floor cleaner as directed.

Note: Use on new pressure treated lumber is not recommended. Lumber must be cured or dried for 6-12 months (based on environmental conditions) prior to anti-slip tape installation for proper adhesion

[CLICK TO VIEW INSTALL GUIDE](#) >>

